
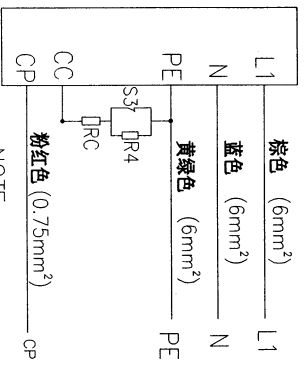
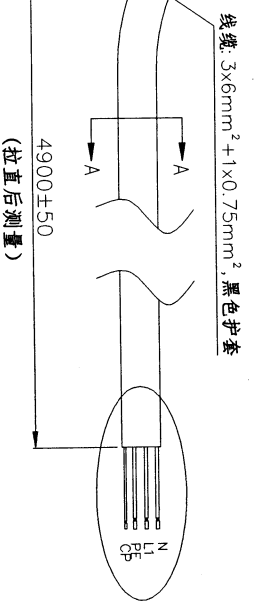
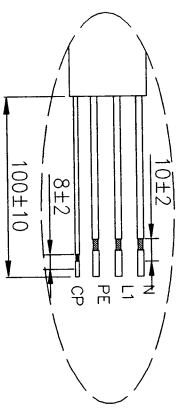
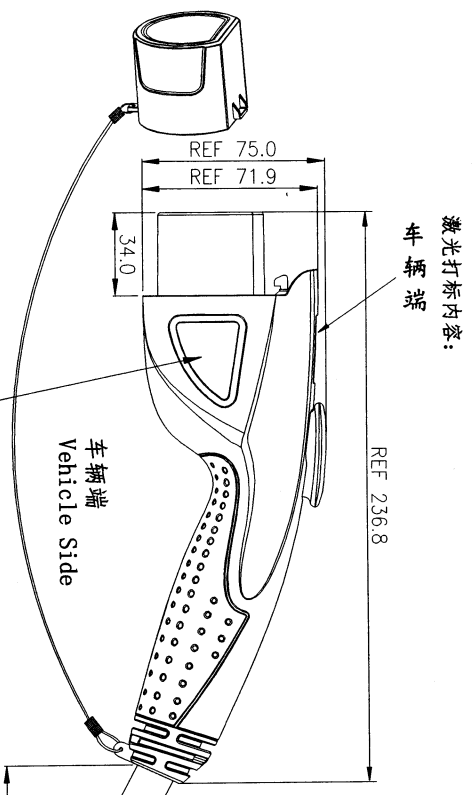


该产品符合最新国标《电动汽车传导充电用连接装置》符合国标GB/T20234.1、2-2015要求

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE



NOTE:
RC=220Ω±3%
R4=3.3KΩ±3%


技术参数

额定电压	250V AC
额定电流	32A
温度范围	-30℃ ~ +50℃
绝缘电阻	>5MΩ, 500V DC 1min
耐压	L, N and PE 2500V AC 1min
	L and N 2500V AC 1min
防水等级	IP55(Mated)
插拔寿命	10,000 Times
插拔力	<100N
标准	GB/T 20234.1、2-2015

指示面激光打标内容如下:
如左:
DEGSON
MGAC032AV035.0MS0AH
32A 250V AC
GB/T20234.2-2015
IP55(mated)
20XXXXXX-XXXX

另一面激光打标内容(Detail字体)
如右:
DEGSON
32A 250V AC
GB/T20234.2-2015
IP55(mated)
20XXXXXX-XXXX

CUSTOMER DRAWING

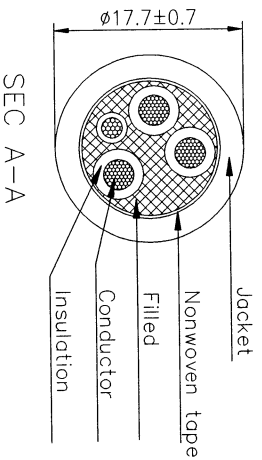

线性尺寸范围	.xx	.x
≤6	±0.05	±0.10
6~30	±0.10	±0.20
30~120	±0.15	±0.30
120~400	±0.20	±0.50
400~1000	±0.30	±0.80
1000~2000	±0.50	±1.20
角度尺寸范围	.xx	.x
	±0.5°	±1.0°

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

名称: 国际交流车辆端充电枪 (32A单相)
MGAC-S-032A-V-03-5.0M-50A(H)

标题: CUSTOMER DRAWING

零件号: 2X 2020513
DT 2020.5.6

日期: 2020.05.06

第三角投影

比例: 1:1