

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

H

G

F

E

D

C

B

A

H

G

F


E

D

C

B

A

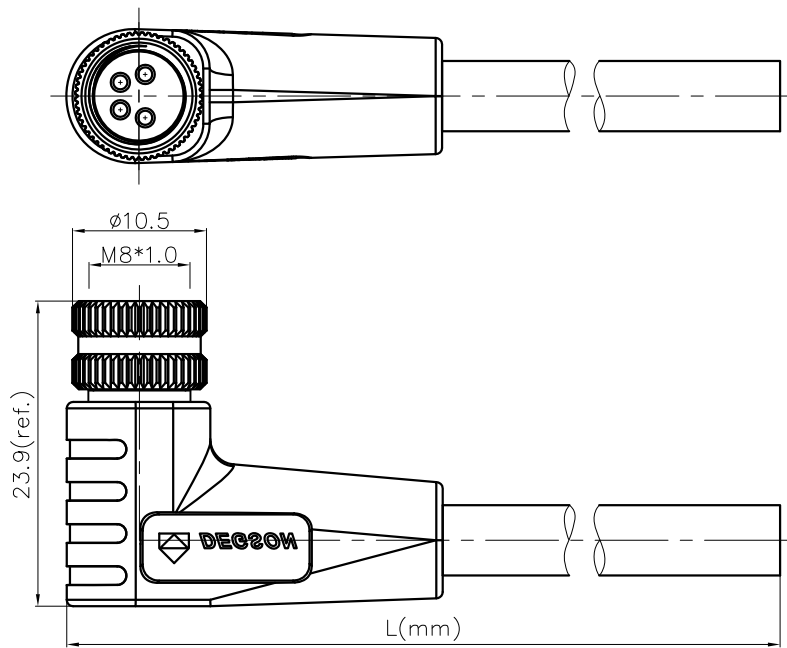

PMSH-M8X-XXP-FF-SR7XXX-00A(H)
 Coding: A,B
 Pin number: 03,04, 05,06,08
 Cable jacket:
 C: PVC UL2517 For UL Approve
 D: PUR UL20549 For UL Approve
 Cable length
 01: 1M
 ...
 99: 99M
 The line grows business trip:
 01~05m: ± 50mm
 06~10m: ± 100mm
 11~30m: ± 200mm
 31~99m: ± 500mm

- NOTES:
- Rated voltage/current : 3pin: 60V / 3A
 4pin: 60V / 3A
 5pin: 30V / 3A
 6pin: 30V / 1.5A
 8pin: 30V / 1.5A
 - Withstanding voltage : 3,4pin: AC850V/1Min
 5,6,8pin: AC650V/1Min
 - Levels of protection: IP67
 - Cable specifications :
 3pin: 3C*24AWG/0.25mm²,Shield,UL2517/UL20549
 4pin: 4C*24AWG/0.25mm²,Shield,UL2517/UL20549
 5pin: 5C*24AWG/0.25mm²,Shield,UL2517/UL20549
 6pin: 6C*26AWG/0.14mm²,Shield,UL2517/UL20549
 8pin: 8C*26AWG/0.14mm²,Shield,UL2517/UL20549
 - Wire connection mode: soldering
 - Operating temperature: -25°C~+80°C
 - RoHS Compliance
 - Tolerance : ±0.5mm

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
Shield	Braid	Shield	Braid	Shield
4	Black	4	Black	8
3	Blue	3	Blue	7
1	Brown	2	White	6
Pin	Wire Color	Pin	Wire Color	5
Pin Out	Pin Out	Pin Out	Pin Out	4

DETACHED LISTS	PART NO.: PMSHM8XXXPFSL7XXX00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PMSH-M8X-XXP-FF-SR7XXX-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.09.06	REV	D0-2	
		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
THIRD ANGLE PROJECTION	MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1	