
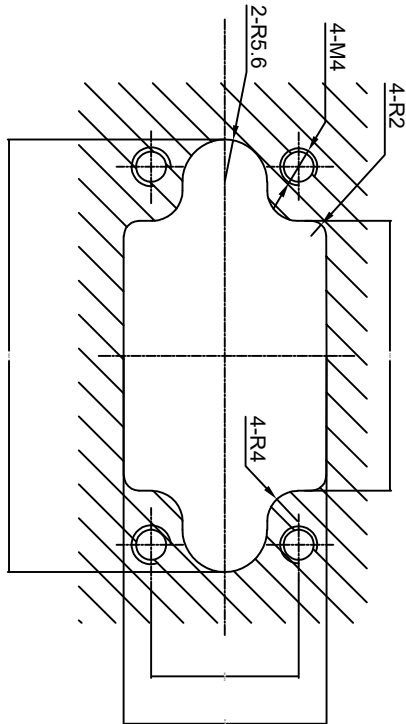


未注公差/General tolerances(mm)														0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±7
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

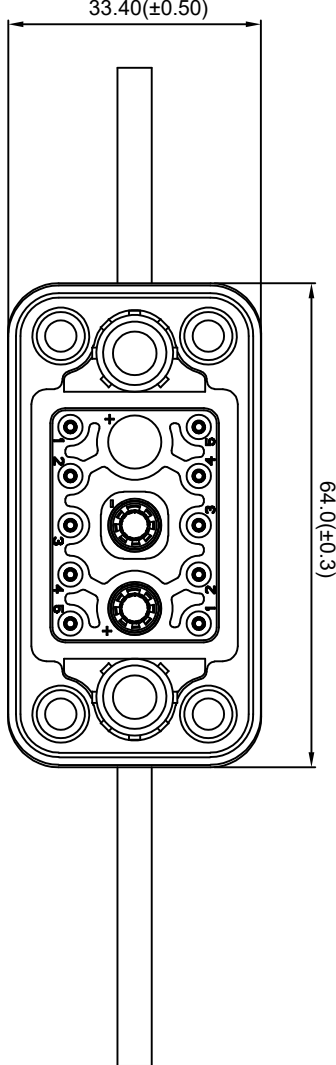

推荐面板开孔尺寸

型号说明

RA-EBB-F-2010-F-L300-00A(H)

插头

组装式


系列名称

母端

通用型环保产品

线长300mm

产品插针数量
功率针2pin,
信号针10pin

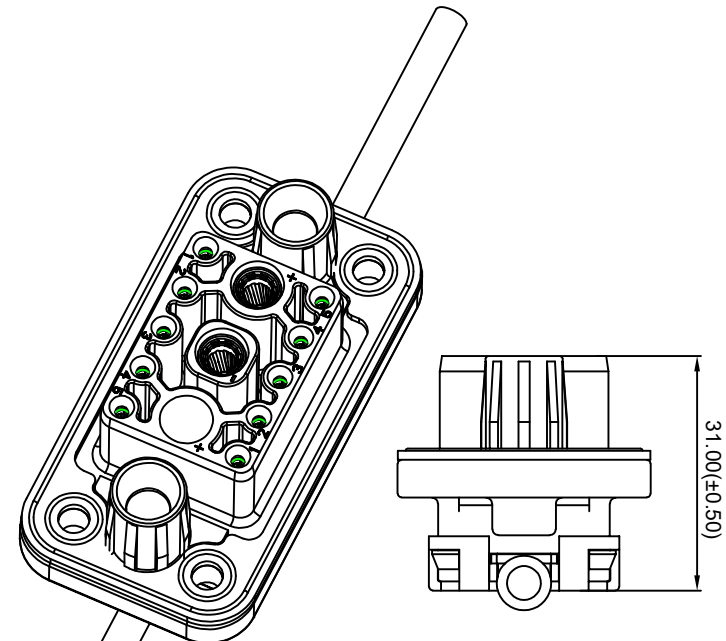

额定电压/电流/Rated Voltage/Current	72V/60A
绝缘电阻/Insulation resistance	≥500MΩ
插拔次数/Mechanical locking life(latching cycles)	5000
耐电压/Withstanding voltage	1500V AC
使用温度范围/Operating temperature(°C)	-40~+105
防水等级/Levels of protection	单边IPX7
接线方式/Terminal	Crimping
导线外径范围/Wire range(mm)	8AWG/22AWG

SURFACE: /

MATERIAL: /

MAT NO.: /
STATUS: /
APPD: /
CHKD: /
DRAFT: Huangju 2021.8.20
TYPE: CUSTOMER DRAWING
SCALE: 2:1
SHEET 1/1

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: RA-EBB-F-2010-F-L300-00A(H)

DRAFT: Huangju 2021.8.20

DRAWING NO.:

REV	ECN	DESCRIPTION	DRAFT	DATE
			Xxx	20XX.XX.X
			XX	X