

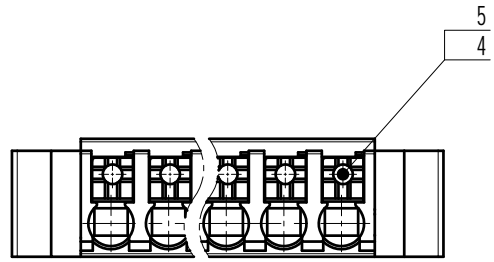


Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized in advance. Violations will be punished. We have no responsibility for compensation. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外, 其他标注均非本公司所有。未经许可, 不得复制或传播。本公司保留对涉及发明、实用新型和外观设计的所有权利。

未注公差/General tolerances (mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±2'
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

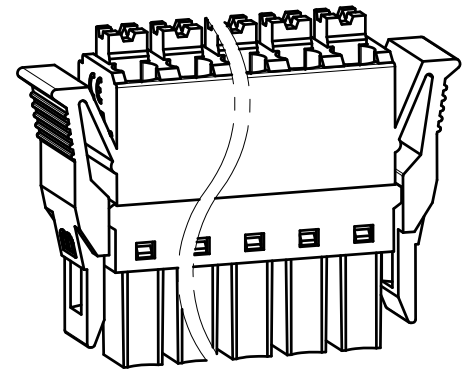

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC 标准/IEC Standard:			
过压类别/Overtoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	160/8	160/8	250/8
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	28~16/ 0.2~1.0		
间距/Pitch(mm)/线数范围/Poles	3.81/N=02~24P		
剥线长度/Stripping length(mm)	10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

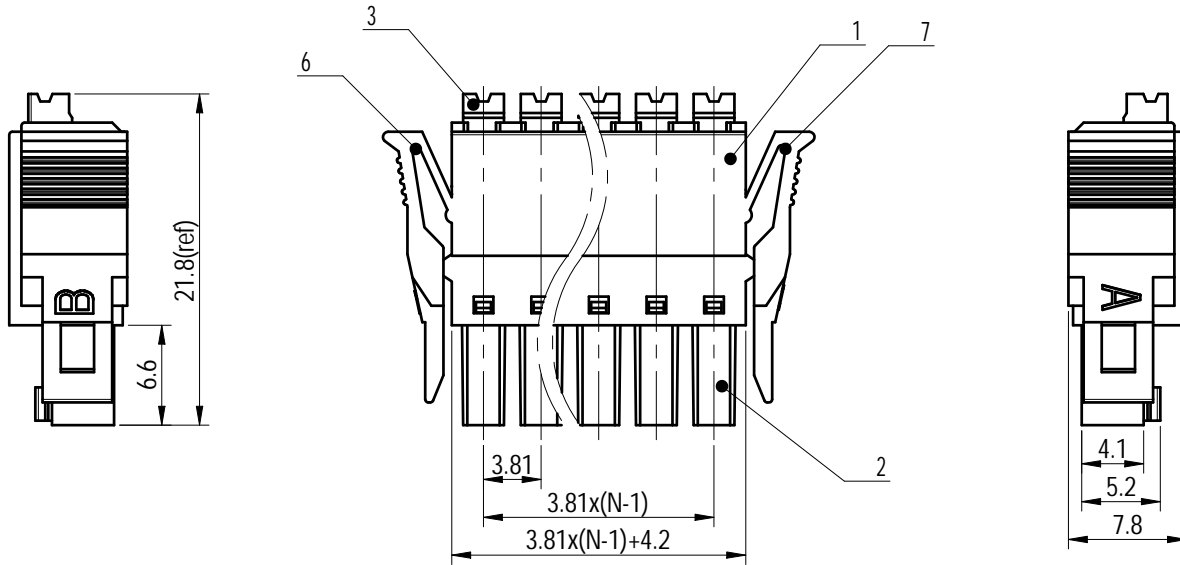

Note:
The A&Z(H) in the name means: A(H) and Z(H).

7	Left Pendant	PA66	UL94V-0
6	Right Pendant	PA66	UL94V-0
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

		MATERIAL:	SURFACE/COLOR:	
APPD: 兰春华 2023.03.14		MAT NO./REV: - / 00	MAT STATUS: 批量	
CHKD: 龚耀志 2023.03.13		NAME		
DRFT: 代永康 2023.03.13		15EDGKNG-3.81-XXP-1Y-1000A&Z(H)		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200020921	CUSTOMER DRAWING	已发布	2:1	1/1

00	REV	ECN	DESCRIPTION	DRFT	DATE	代永康	2023.03.13
----	-----	-----	-------------	------	------	-----	------------