
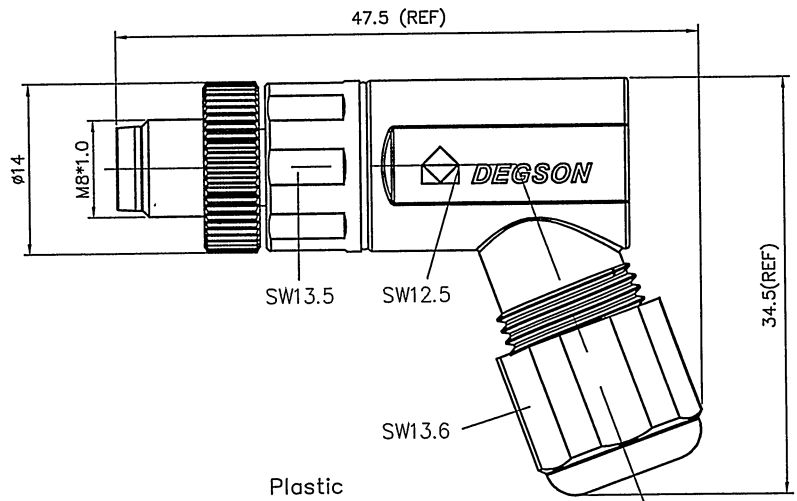


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

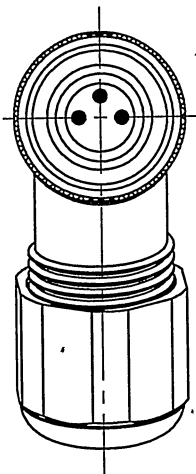

- NOTES:
1. Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
 2. Withstanding voltage : 3,4pin: AC850V/1Min
 3. Levels of protection: IP67
 4. Wire range : 3pin: 24~22AWG/0.25~0.34mm²
4pin: 24~22AWG/0.25~0.34mm²
 5. Cable range : 4~6mm
 6. Wire connection mode: screw
 7. Operating temperature: -40°C~+85°C
 8. RoHS Compliance
 9. Tolerance : ±0.5mm

PB-M8A-~~XX~~P-MM-SR7001-00A(H)
Pin number: 03,04,

3pin A Coding	4pin A Coding
<p>Pin Assignment Front View</p>	<p>Pin Assignment Front View</p>

DETACHED LISTS	PART NO.: PBM8AXXPMSR700100AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: ZX 20190520	NAME: PB-M8A-XXP-MM-SR7001-00A(H)		
	CHKD: 20 2019.5.20	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV	DO-1	
<p>THIRD ANGLE PROJECTION</p>		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE
				1:1