


NOTES:


1. Specifications

- . Contact Resistance: 50mΩ max
- . Insulator Resistance: 100MΩ min.
- . Current Rating: 1.5 A.
- . Rated Voltage: 30V DC
- . Dielectric withstanding voltage: AC 100V For 1 minute
- . Contact: Copper Alloy
- . Housing: Thermoplastic(UL 94V-0)
- . Shell: Copper Alloy

2. Product number code:

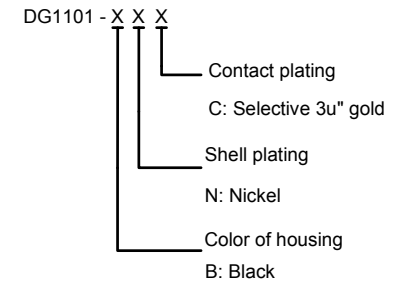

(Series Image-Reference Only)

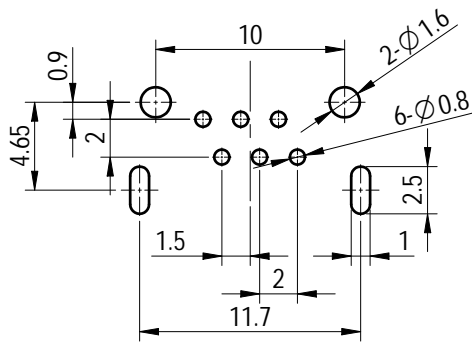

Recommend PCB Layout(Tolerance:±0.05)

GENERAL TOLERANCE			MATERIAL:	SURFACE/COLOR:
X	±0.60		MAT NO./REV:	/ 00
X	±0.38	APPD: 兰春华	2023.08.01	
XX	±0.25	CHKD: 陈招	2023.08.01	
		DRFT: 唐本恒	2023.07.31	
		DG1101-XXX		
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200035057	CUSTOMER DRAWING	已发布	1:1	1/1

00			唐本恒	2023.07.31
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited without the prior written consent of DEGSON. All rights reserved for patent, utility model or design registrations. 除本册子明确授权外, 否则禁止再出、复制或、引用、或在本册子中的内容, 未经授权, 不得复制或传播。本公司保留所有权利。