



Ø29.8±0.20

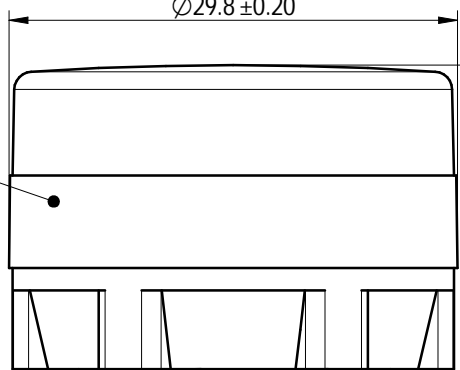

13.6±0.20

1

Ø21.8±0.20

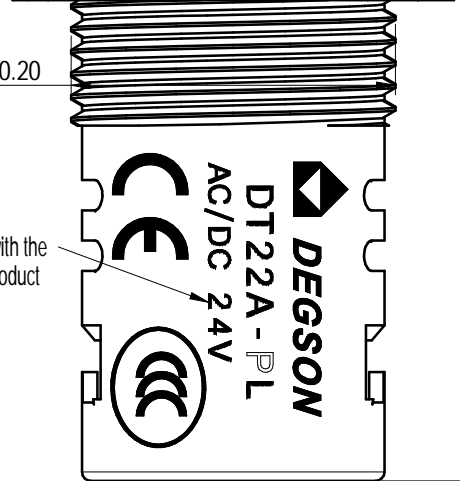

38.5±0.5

Print content with the name of the product

未注公差/General tolerances(mm)											0.1/10			
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

DT22A - PL / Y AC/DCZV S (product standard):
 S: Short
 (Voltage grade):
 AC/DC: 6/12/24/36/48/110/220V
 AC: 110/220/380V
 (Color): RD: (Red)
 GN: (Green)
 YE: (Yellow)
 WH: (White)
 BU: (Blue)

(Series No.)

(Product Type): PL: Pilot Lamp

ITEM	NAME OF PART	MATERIAL	NOTES
1	Pilot Lamp	/	/

连续工作寿命/Continuous working life(H)	≥4W
允许瞬间电压波动/transient voltage fluctuations are allowed	±20%(110V以上)
工频耐压/Power frequency withstand voltage	2.5kV(交流有效值), 1min
使用频率(AC)/operating frequency(AC)	50-60Hz
额定工作电流/rated operational current(mA)	≤20
光亮度/brightness	≥100cd/m ²
相比漏电起痕指数CTI/comparative tracking index	≥100, 阻燃
绝缘电阻/insulation resistance	U _i ≤60V为5mΩ 60<U _i ≤660V为50mΩ
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number: PANTONE / RAL	/

DEGSON		MATERIAL:	SURFACE/COLOR:
APPD: 李根旁	2022.10.12	MAT NO./REV: / 00	MAT STATUS: 小批量
CHKD: 马恩开	2022.10.12	NAME DT22A-PL/YAC/DCZVS	
DRFT: 马恩开	2022.10.12	DRAWING NO. 200112723	TYPE CUSTOMER DRAWING
		DRAWING STATUS work	SCALE 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00		New Drawing	马恩开	2022.10.12

Transfer or duplication of this document as well as the utilization or summation of its contents are prohibited unless authorized in general. All rights reserved for patent. Utility model or design registrations. 除专利、实用新型、外观设计、发明专利、软件著作权、商标、印刷、注册商标外，其他权利均归本公司所有。未经许可，不得复制或传播。