
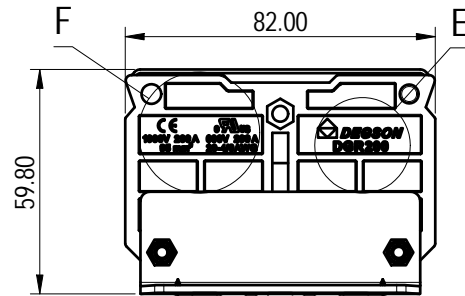
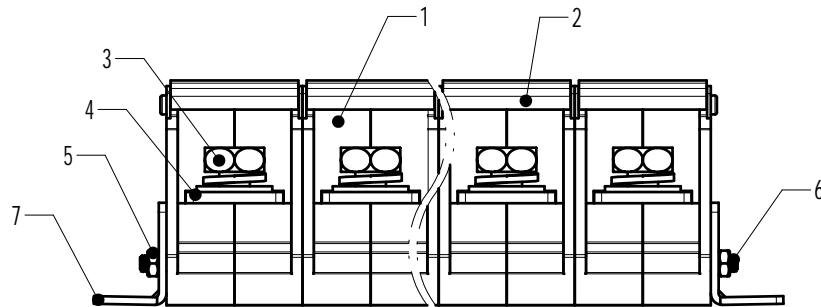



未注公差/General tolerances (mm)													0.1/10 ±2'
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

(W/O COVER VIEW)

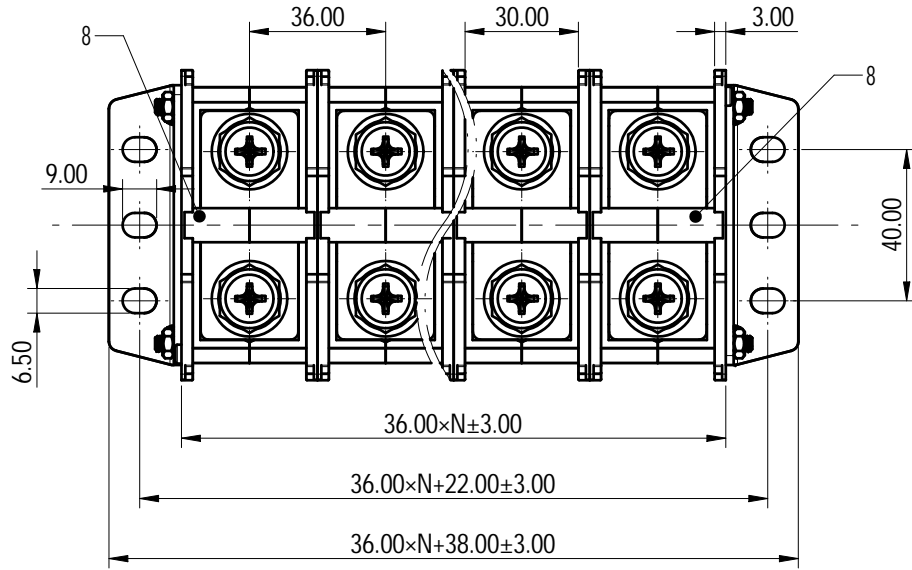

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
8	Tag	PVC	UL94V-0
7	Fastener	Steel	Zn Plated
6	Connect pillar	Stainless steel	/
5	Nut	Steel	Zn Plated
4	Current carrier	Copper alloy	Ni Plated
3	Screw	Steel	Zn Plated
2	Cover	PC	UL94V-2
1	Housing	PC	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/200	600/200	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M10, 9.0/80		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	28~12 / 1.0~2.5		
间距/Pitch(mm)/线数范围/Poles	36.00/N=01~16P		
剥线长度/Stripping length(mm)	20~22		
使用温度范围/Operating temperature(°C)	-40~+125		
符合RoHS环保要求/Conform to RoHS	Yes		

	MATERIAL:	SURFACE/COLOR:
	MAT NO./REV: - / 00	MAT STATUS: 批量
APPD: 蓝贵凡 2023.09.18	NAME	
CHKD: 曹利彬 2023.09.18	DGR200-XXP-1Y-20A&Z(H)	
DRFT: 姜民洁 2023.09.18	DRAWING NO. 200228996	TYPE CUSTOMER DRAWING
	DRAWING STATUS 已发布	SCALE 2:1
		SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			姜民洁	2023.09.18

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by Degson. All rights reserved for patent, utility model or design registrations. 除专利、实用新型、外观设计、商标、注册、著作权等文件外，其他文件均受法律保护。未经授权，不得复制或传播。 Degson 保留所有权利。