
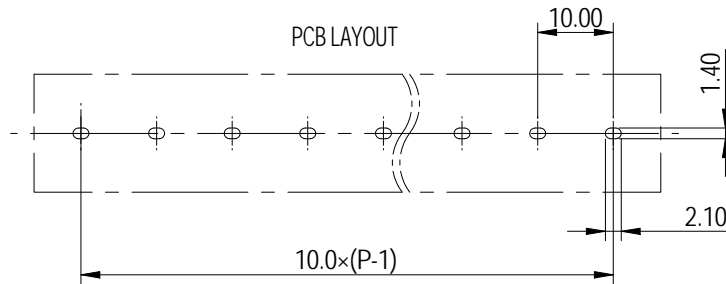

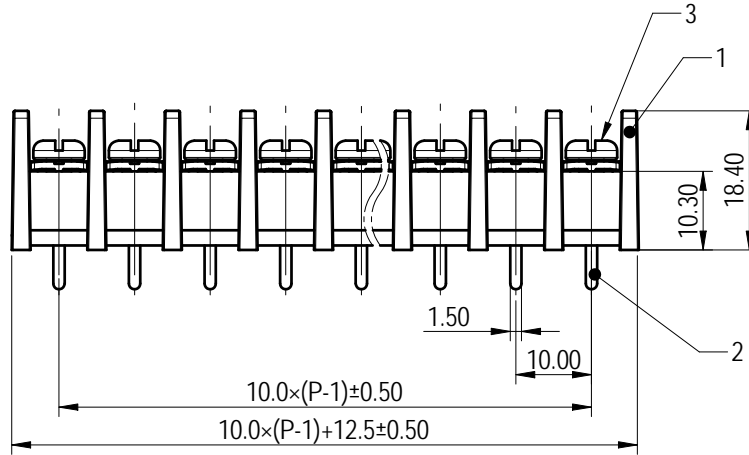



Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless explicitly permitted. Violations will be held for compensation. All rights reserved for patent, utility model or design registrations. 除专利等明确标注外，其他内容均受法律保护。未经本公司书面许可，任何单位和个人不得擅自复制或传播。本公司保留追究法律责任的权利。

未注公差/General tolerances (mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

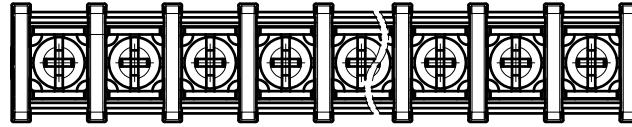

Note: The A&Z(H) in the name means: A(H) and Z(H).

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)	B	C	D
300/20	/	300/10	
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4, 1.2/10.62		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	22~12		
间距/Pitch(mm)/线数范围/Poles	10/N=02~26P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

<b>DEGSON</b>		MATERIAL:	SURFACE/COLOR:		
APPD: 蓝贵凡	2022.12.20	MAT NO./REV:	/ 00		
CHKD: 曹利彬	2022.12.20	NAME			
DRFT: 孙科豪	2022.12.20	DG55C-B-XXP-1Y-00A&Z(H)			
DRAWING NO. 200125402		TYPE CUSTOMER DRAWING		DRAWING STATUS 已发布	SCALE 2:1
SHEET 1/1					

REV	ECN	DESCRIPTION	DRFT	DATE
00				