
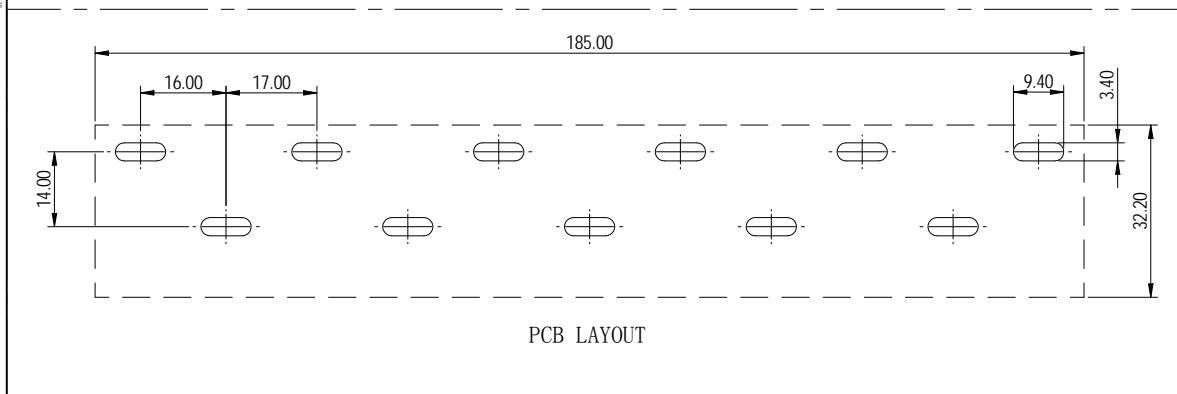
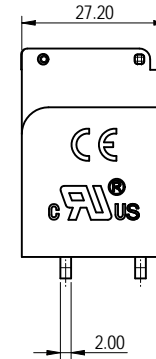
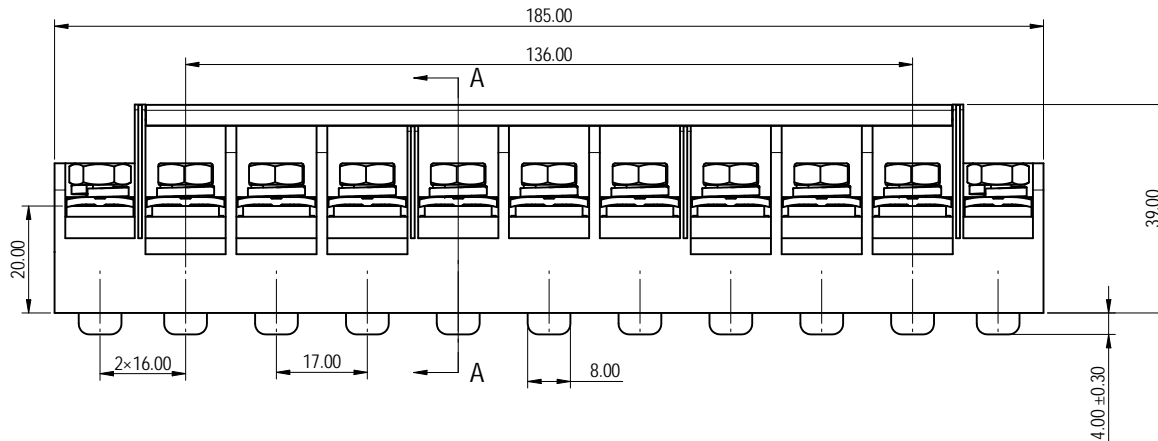




公差/General tolerances (mm)													D 0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
~	3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

(W/O COVER)

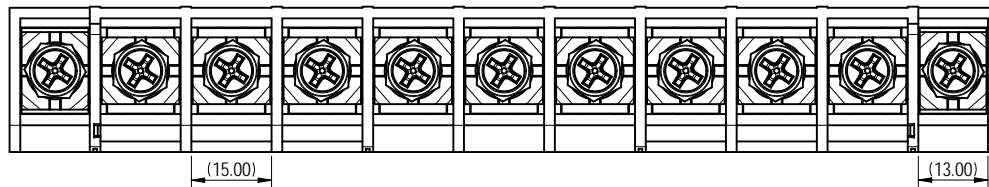

Note: The A&Z (H) in the name means: A (H) and Z (H).

ITEM	NAME OF PART	MATERIAL	NOTES
5	Cover	PC	UL94 V-2
4	Nut	Steel	M6/Zn Plated
3	Screw	Steel	M6/Zn Plated
2	Pin header	Copper Alloy	Sn Plated
1	Housing	PBT	UL94 V-0

UL 额定电压/Rated Voltage/Current	600V/80A
UL 工频耐压/R.M.S withstand voltage	AC2200V/1Min
线径范围/Wire range(AWG)	26~4
线数范围/Poles	N=11P
螺丝扭矩/Tightening torque(Lb.in)	M6, 70.0
使用温度范围/Operating temperature(°C)	-40~+120

	MATERIAL:	SURFACE/COLOR:	
	MAT NO./REV:	/ 00	MAT STATUS: 批量
APPD: 蓝美凡	2023.10.07	NAME:	DG1716-B-11P-1Y-00A&Z(H)
CHKD: 曹利影	2023.10.07	DRAWING NO.:	200221833
DRFT: 孙科豪	2023.10.07	TYPE:	CUSTOMER DRAWING
		DRAWING STATUS:	已发布
		SCALE:	1:1
		SHEET:	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization or reproduction of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent.